




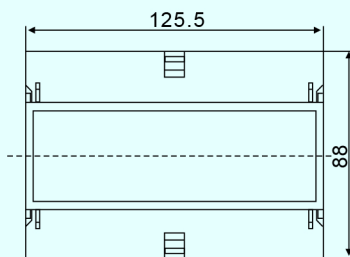

◆ Overall and installation dimensions

Weight: about 0.9kg



◆ Product Overview

This three-phase active power meter is a rail-type advanced microelectronic technology and SMT manufacturing process of products, the product used in rated frequency 50Hz (optional 60Hz) of the three-phase AC active energy measurement. The three-phase active power meter with IR and RS-485 port communication function, using LCD display that can be used hand-held meter reading machine set-up and electricity meter reading. To achieve the ideal of measuring residential electricity billing meters, also has a measurement of high precision, high sensitivity, reliable performance, wide loading, low power consumption, small size, light weight, simple operation, easy to install etc.

The product meets the IEC 62053-21 standard for electronic energy meter of all the technical requirements.

◆ Features

- measuring three-phase active energy, long-term work without adjustments;
- three-phase power supply line (three-phase three-wire watt-hour meter in either three-wire line) or two lines (three-phase four-wire watt-hour meter in either two-wire four-wire) power outages, measurement accuracy is not affected;
- wide operating temperature range;
- with broken functionality or voltage relative to instruction indicator function;
- with the reverse direction feature: When the current is reversed, reverse indicator light;
- when the meter communicating with external devices, communication indicator light, said the state energy meter in communication.

◆ The main technical parameters

Rated current	3×1.5(6)A, 3×5(20)A, 3×10(40)A, 3×15(60)A, 3×20(80)A, 3×30(100)A
Rated voltage	3 × 100V three-phase three-wire or 3 × 380V
	Three-phase four-wire 3 × 220/380V, or 3 × 57.7/100V
Rated frequency(Hz)	50Hz、60Hz
The accuracy class	class 1.0、class 2.0